

PHYSICAL SCIENCES LABORATORIES AT THE AEROSPACE CORPORATION



- Pg. 3 PSL Overview
- Pg. 5 Additive Manufacturing
- Pg. 6 AeroTel
- Pg. 7 Atomic Clocks
- Pg. 8 Composites
- Pg. 9 Directed Energy
- Pg. 10 Environmental Testing
- Pg. 11 EP3 (Electric Propulsion)
- Pg. 12 Fiber Laser Development Lab
- Pg. 13 Free-Space Laser Applications
- Pg. 14 Hyperspectral Imaging
- Pg. 15 Laser Beacon
- Pg. 16 Microelectronics
- Pg. 17 Micropropulsion
- Pg. 18 Non-Destructive Evaluation
- Pg. 19 Optical Communications
- Pg. 20 Optical Signal Processing
- Pg. 21 Propulsion Research Facility
- Pg. 22 Quantum Photonics
- Pg. 23 Radiation Effects
- Pg. 24 Replicated Optics
- Pg. 25 RF Breakdown (Multipactor)
- Pg. 26 Space Batteries
- Pg. 27 Spacecraft Contamination
- Pg. 28 Space Domain Awareness

- Pg. 29 Space Environmental Effects
- Pg. 30 Space Photovoltaics
- Pg. 31 Space Sensors
- Pg. 32 Thin Films and Optical Coatings





The space enterprise is congested, contested, and growing at an unprecedented rate. Shorter acquisition timelines, increased proliferation of space assets, and an elevation of the space domain in national security have created a need for greater agility in development, procurement, fielding, and operating of systems to meet these new demands. Implementation of new, science-based, technologies and methodologies is imperative to making the leap to the next era in space. The Aerospace Physical Sciences Laboratories (PSL) provide the robust and innovative physical research backplane to achieve that implementation.

PSL's scientific impact is sustained and grown via a diverse research portfolio. Our work blends foundational scientific expertise with cutting-edge research to serve a broad customer base. PSL's exclusive ability to work with all stakeholders: (government, industry, and academia) enables us to provide novel solutions to the most challenging issues in current and future technologies. The strength of PSL comes from the combination of cutting-edge tools and facilities, a vast repository of space-system knowledge, and the extensive technical expertise of our people.

We harness these tools and expertise in 156 different laboratories to tackle the new challenges within the space enterprise. All PSL laboratories, capabilities, and personnel are aligned around four focus areas, each designed to tackle the new challenges of the space enterprise: Technology Development and Prototyping, Science-Enabled Agility, Resiliency and Space Warfighting R&D, Advanced Concepts.



Technology Development and Prototyping

Development geared toward increasing the readiness of available technologies for adoption by the space community.



Science-Enabled Agility Accelerating traditional acquisition cycles by using science to identify and exploit efficiencies in mission assurance.



Resiliency and Space Warfighting R&D

Research and development advancements to enable space-domain asymmetric advantage and space resiliency.



Advanced Concepts Application of unique Aerospace competencies to fulfill future customer needs.



PSL by the numbers:

- > Over 250 employees
- Over 70% of technical staff have post-graduate degrees
- > Disciplines of Technical Staff:
- Physics: 30:1% Chemistry: 26.1% Engineering: 22.1% Materials Science: 10.2% Space Science: 4.0% Other: 3.5% Computer Science: 2.2% Mathematics: 1.3% Astrophysics: 0.4%



Examples of PSL Expertise and Technologies



Technology Development and Prototyping: Innovative Replicated Optics. A PSL team has been using replication technology and lightweight materials to create high-precision optics free from traditional mirror grinding or polishing requirements and much lighter in weight. Scientists in our materials lab use lightweight composites

and Aerospace-patented protocols to produce these mirrors and have conducted rigorous experimental investigations of stress relief and stabilization of the optics with extreme humidity exposure tests. This realistic handling and exposure has dramatically improved the confidence in mirror performance, cutting both weight and production times, and fundamentally improving acquisition tradeoffs for next-generation space systems.



Science-Enabled Agility: Accurate Space Photovoltaics Characterization for Advanced

Technology Infusion. Solar cells and solar arrays are among the most vulnerable and costly subsystems for a spacecraft. As acquisition cycles shorten and threats become more dynamic, Aerospace is responding with agile mission assurance

processes supported by state-of-the-art solar cell characterization and prototyping. Our space photovoltaics expertise has been critical to the development of the Aerospace Measurement Unit, which combines high-precision zero-drift analog circuitry with low power digital electronics to allow for laboratory-grade measurements of current, voltage, temperature, and solar illumination angle at a fraction of the size of a traditional test setup. Customers can characterize the on-orbit performance of advanced solar cell technologies in the lab, allowing for quicker infusion of advanced technologies into space systems.



Resiliency and Space Warfighting Research and Development: Space Domain Awareness Enabled by Sensors on the Ground and in Space. The Remote Sensing Department

has decades of experience in both developing sensors and collecting data in all wavelengths of light, from visible to infrared. Our sensors are embedded in a wide range of platforms, ranging from some of the largest telescopes on the planet to the smallest cubesats on orbit. These systems serve as testbeds, calibration sources, and data collection sources to enhance our customers' insights into operational environments and



Advanced Concepts: Quantum Photonics Technologies. Quantum technologies use the properties of atoms and photons to measure or produce phenomena fundamentally inaccessible with classical systems. Quantum properties can

be exploited to perform secure communications, signal-to-noise enhanced sensing and imaging, parallelized computing, and other applications that can significantly impact the implementation and operation of space assets. The quantum cryptographic lab features several custom analytical and numeric toolsets for the analysis of quantum photonics-based systems. The team has built multiple testbeds for the evaluation of photon sources and detectors integral to the implementation of photonics technology.



Technology Development and Prototyping: Replicated composite optics are fabricated to be lightweight, reducing manufacturing time and cost.



Rapid and Agile Acquisition: Aerospace has developed a miniaturized test platform to measure the performance of solar cells above the ozone layer to calibrate the solar simulator in the lab.



Resiliency and Space Warfighting R&D: Our Hyperspectral Imaging lab sensors are embedded in a wide variety of platforms.



Advanced Concepts: Aerospace has built a fully functioning quantum cryptographic lab.

The Aerospace Corporation

to provide options for mission execution.


The Aerospace Corporation is a leading architect for the nation's space programs, advancing capabilities that outpace threats to the country's national security while nurturing innovative technologies to further a new era of space commercialization and exploration. Aerospace's national workforce of more than 4,600 employees provides objective technical expertise and thought leadership to solve the hardest problems in space and assure mission success for space systems and space vehicles. For more information, visit www.aerospace.org.

The Aerospace Corporation | 14745 Lee Road, Chantilly, VA 20151 USA | www.aerospace.org COL034.0225_PSLO © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.

ADDITIVE MANUFACTURING

Technology Development and Prototyping

AEROSPACE

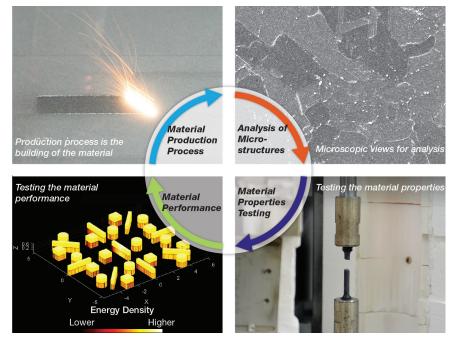

Materials science is about understanding the relationship between the processing, structure, properties, and performance of any given material. Studying how the metrics of a build relate to overall part performance results in updated processing parameters to optimize material properties.

Unique Engineering Solutions in the Space Domain

Additive manufacturing (AM) is a revolutionary new capability in which materials can be printed into 3D forms layer-by-layer. Parts can be made with less cost, shorter lead times, and in novel geometries that are inefficient or impossible to create with conventional manufacturing. The versatility offered by AM technology has the potential to vastly improve our agility in the space domain.

Our in-house testing and characterization capabilities allow us to better understand the limitations of AM materials, determine what tests best predict their performance, and tailor unique microstructures that are currently not available with standard processing practices. Ultimately these tools can be used to manufacture prototypes and hardware to develop unique engineering solutions like composite replicated optics and antenna structures.

Aerospace has been a leader in additive manufacturing since 2012, initially supporting the EELV launch development program office. In 2016, we began working with metal when we acquired our own in-house selective laser melting (SLM) capability. We collaborate with other Aerospace groups on AM manufacturing in areas such as structural analysis, machine learning, and propulsion. We have over 75 publications on the topic, patents, and have presented extensively throughout the community.



Aerospace Circle-A logo manufactured out of invar.



Aerospace scientists prepare to quench metal samples during the heat treatment of Ni-based superalloys.



Additive manufacturing enables the production of geometrically complex parts as monolithic pieces, increasing manufacturing efficiency while reducing costs and lead times.

AEROTEL/REMOTE SENSING

Resiliency and Space Warfighting R&D

sensors. Rather than focusing solely on visible

light imaging sensors, we have experience

at all wavelengths from visible to long-wave

Technology Development and

Prototyping


AeroTel is one of Aerospace's on-site telescopes, developed and operated by the Remote Sensing Department. It serves as both a testbed for new types of sensors that we develop here at Aerospace and as our own observatory. These novel sensors are developed both for Space Domain Awareness and scientific inquiry. As an observatory, we can obtain unique data of immediate interest for our customers, responding as soon as the need arises. The Remote Sensing Department has decades of experience developing and collecting data with a large variety of different types of

AeroTel is a 1-meter telescope that serves as a testbed for new sensors and as our own on-site observatory.

infrared light as well as phenomenologies such as polarimetry and spectroscopy. Aerospace's sensors operate on a suite of research telescopes ranging up in size to some of the largest telescopes on the planet, such as the Gemini North 8-m telescope on Maunakea, Hawaii.

Aerospace's Visible and Near-InfraRed Imaging Spectrograph (VNIRIS) is heavily utilized for study of resident space objects (RSOs). Aerospace's visible-light POLarimeter for Inclination Studies of Hot jupiters 2 (POLISH2) is used to study RSOs and a variety of astrophysical objects including extrasolar planets, solar system asteroids, and pulsars. Aerospace's Short-Wave Infrared Camera for AeroTel (SWIRCAT), which is the engineering model for a sensor currently aboard the International Space Station, enables wide field of view imaging of resident space objects from LEO to geostationary orbits. Finally, Aerospace's Broadband Array Spectrograph System (BASS) is regularly used to deliver ground-truth data to the Space-Based Infrared System (SBIRS) program for calibration of each space asset.

Aerospace's BASS instrument is regularly used to calibrate space assets.





SWIRCAT is used for space domain awareness and for infrared imaging of celestial objects.

The Aerospace Corporation | 14745 Lee Road, Chantilly, VA 20151 USA | www.aerospace.org

PSLT022.0225_ATRS © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.







ATOMIC CLOCKS





Development and Prototyping





Dr. Daniele Monahan investigates the microwave interrogation on a next-generation atomic clock testbed.

Atomic clocks and precise timekeeping algorithms are essential for robust, resilient, and effective position, navigation, and timing (PNT) and communications. High-performance atomic clocks are found in global navigation satellite systems (GNSS), such as GPS; MILSATCOM satellites, such as Advanced Extremely High Frequency (AEHF); and ground stations all over the world. The timekeeping algorithms in these constellations and ground systems are critical for optimizing timekeeping performance to meet mission requirements and objectives.

The Atomic Clocks and Precise Timekeeping Laboratory investigates the underlying physics of current and next-generation atomic clocks

and examines how the physics and mechanisms of these devices affect the algorithms used for precise timekeeping. Our lab tests actual flight clocks in a simulated space environment to evaluate their on-orbit performance under anomalous or stressing conditions. These next-generation clock testbeds investigate the physics and viability of new clock technology for improved timekeeping and reduced size, weight, and power.

The atomic clocks group has presented and published hundreds of atomic clock related studies and provided subject matter expertise for many Aerospace customers on clock and precise timekeeping programs. The next generation of atomic clocks will adopt new technologies such as lasers and photonic integrated circuits. We are prototyping these new technologies to better understand the physics and performance improvements and to accelerate the manufacturing on-ramp process.



Aerospace Technical Fellow Dr. James Camparo examines the laser alignment on a next-generation atomic clock testbed.



Evaluating atomic clocks of today: (clockwise starting with top left) GPS IIF RAFS, AEHF RMO, PRS10, CSAC, LN-CSAC.

AEROSPACE

COMPOSITES





Technology Development and Prototyping Science-Enabled Agility

Composite materials are common in a wide range of ground and air-based industries, but composites used in spacecraft have unique requirements and considerations. The Composites Laboratory not only has extensive knowledge and experience supporting composite space hardware, we also have the facilities to manufacture and study composite materials.

Aerospace has supported every aspect of composite materials for space applications from high-temperature carbon-carbon composite processing for exit cones and nozzles to low-moisture absorbing polycyanurate resin components for satellite




In the Composites Lab, we pair our manufacturing and analytical capabilities to provide end-toend expertise for our customers.

structures. Our expertise coupled with our manufacturing capabilities allows us to support composite space hardware issues for a wide range of programs and customers.

The Composites Laboratory has extensive experience and the full suite of capabilities to manufacture parts, evaluate composite microstructures, and thermally and mechanically test composite materials. Our unique experience in the manufacture and development of non-structural composites for innovative space solutions means we stand apart from the rest of the space industry in this field.

Aerospace continues to stay on the forefront of composites research by characterizing new composite materials for reusable launch vehicles, carbon-loaded composites for antenna applications, and replicated optics that stand to revolutionize optical components for space. We are also pioneering new manufacturing and testing protocols and methodologies for a more agile industry.

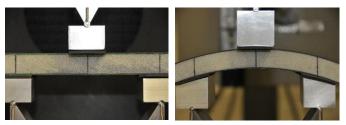

Composite materials destined for use in space have more rigorous requirements than those commonly used in other industries.




The Composites Lab features manufacturing capabilities that grant personnel firsthand experience in the manufacturing processes that impact Aerospace's customers.



DIRECTED ENERGY

Resiliency and Space Warfighting R&D

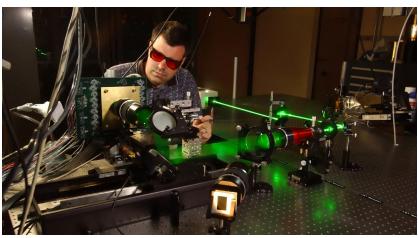


Our new dedicated laboratory facility will enable us to rapidly assess threats and the relationship between orbit, CONOPS, and the effect on mission capabilities.


As the space environment grows increasingly contested, the threats to critical space assets and associated ground systems will increase. Highenergy laser and high-power microwave technology has become more prevalent and mature, elevating the threats associated with these types of potential attacks. These directed energy effects pose risks to space systems and their ability to perform critical mission functions by damaging, degrading, or denying system operation. In order to outpace these emerging threats, we need to understand the mechanisms through which the threats can exploit our systems and architectures. This understanding will lead to more resilient designs of spacecraft and ground systems, and ultimately a more resilient space architecture and enterprise.

Aerospace is leading the creation of an Integrated Product Team (IPT) and Center of Excellence designed to provide rapid program risk reduction via cross-departmental collaboration and agile, independent tests of defensive concepts. The capabilities we are bringing together and enhancing will produce device-to-system level requirements, verification and CONOPS options, in addition to independent verification of risk and resiliency. It is essential that we can support our customers by rapidly understanding and addressing emerging threats to protect national space superiority.

As directed energy systems proliferate, it is critical to acquire quantitative understanding of the mechanisms of their action on space systems and their components. The Aerospace team accomplishes this using a combination of modeling, simulation, and laboratory measurements. We have established expertise in the many fields that together address the threats presented by directed energy. This expertise ranges from high energy lasers, end-to-end system modeling, high power microwaves, sensor technology, and mission analysis. This IPT not only includes a new dedicated directed energy effects laboratory facility but also brings enterprise-wide expertise from across Aerospace, developing existing capabilities and experience to improve agility and effectiveness.

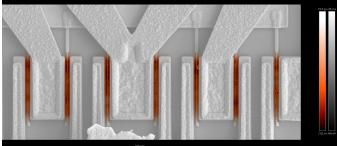

Aerospace has an advanced suite of physical analysis capabilities that can rapidly assess component damage. Above we see clearly defined high-power microwave damage regions detected by Electron Beam Induced Current imaging.

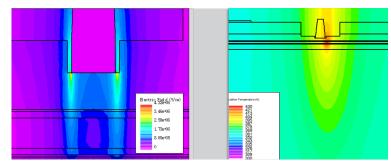

An all-encompassing modeling approach leads to a more comprehensive understanding of directed energy effects. Above, thermal and electric field modeling results of a Gallium Arsenide Low-Noise Amplifier under short pulse radio frequency exposure were used to understand device performance data and destructive physical analysis results.



ENVIRONMENTAL TESTING





Technology Development and Prototyping Science-Enabled Agility

Between manufacture and launch, space components often spend long periods of time being handled or in storage. Environmental testing is essential to determining the quality and durability of critical flight components. The Environmental Testing Laboratory offers acquisition support in assessing the durability of a wide range of components including optics, optical coatings, and electronics.

The Environmental Testing Laboratory is equipped with a humidity chamber, a salt fog chamber, and a mixed-flowing-gas (MFG) testing system. The humidity and salt fog tests are conventional durability



Aerospace is the first to use the mixed-flowing-gas test method to assess metallic mirror coatings, which are a critical component in many space systems.

tests for optical coatings as specified in many military standards. The MFG is an accelerated test that simulates the kinetics and degradation mechanisms of metals found in indoor environments.


Aerospace is the first to utilize the MFG test method to assess metallic mirror coatings, which are a critical component in many space systems. The MFG test utilizes synergistic effects of temperature, humidity, and low concentrations of three air pollutants to achieve accelerated atmospheric corrosion of metals.

We plan to further develop the MFG test as an accelerated life testing method for metallic mirror coatings. Additionally, with the combination of a long-exposure study and MFG testing of silver mirror coatings, we now have some preliminary data for predicting the life of one type of silver mirror. Expanding the study to include additional mirror types will allow us to build a database on the life expectancy of this critical component.

We continue to develop our capabilities and upgrade our test equipment to improve the control of test conditions and afford more efficient and accurate testing performance for our customers.



A salt fog test performed on a mirror resulted in distinct blue, cloud-like shapes, which are chemical corrosions on the mirror surface caused by the salt.



A closeup of the corrosion and cracks on the edge of a conductive coating sample after a humidity test was performed.



The mixed-flowing-gas testing system simulates the kinetics and degradation mechanisms of metals found in indoor environments.

EP3: AEROSPACE'S NEW FACILITY FOR NEXT-GENERATION EP TESTING

As available onboard power increases, spacecraft can afford to utilize larger and more powerful electric propulsion (EP) systems, which has driven the development of higher-power thrusters. Aerospace recently completed construction of a new test facility -nicknamed EP3- that is designed to accommodate the next generation of high-power EP technology. The new facility is designed to maximize size and pumping speed, which positions Aerospace to address the testing needs of the EP community for

With today's rise in commercially available EP systems developed by small companies and new space entrants, EP3 positions Aerospace to provide test services to a wide range of customers. The unique attached semi-anechoic facility enables the

decades to come.

acquisition of critical electromagnetic interference and compatibility (EMI/EMC) data that is essential for thruster integration.

EP3's enormous pumping speed means that thruster tests can be performed in a more flight-like environment than ever before, providing ground data that will most accurately predict on-orbit performance. Staffed by world-leading experts in thruster technology, plasma diagnostics, and thruster/satellite integration, Aerospace can provide end-to-end solutions to the toughest propulsion challenges.

EP3 features a unique EMI/EMC test facility that lets Aerospace acquire thruster emission data that is critical for spacecraft integration concerns. An 8 ft long Radio Frequency-transparent fiberglass vacuum chamber is attached to EP3 through a large gate valve and is surrounded by a semi-anechoic room that provides isolation from background noise.

Key figures:


14'

- > Dimensions: 14 ft diameter, 30 ft long vacuum chamber
- > Volume: 140,000 L
- > Estimated facility weight: 250 tons
- > Vacuum: Custom cryopump system capable of 1,000,000 L/sec pumping speed on Xe, base pressure <1e-8 Torr N₂

30'


› Attached semi-anechoic facility for EMI/ EMC measurement

Aerospace's new EP3 facility was designed and built to test the next generation of high-power electric propulsion technology.













This graph shows chamber volume and pumping speed for large EP test facilities in the U.S. and Europe. EP3's large volume, coupled with exceptional pumping speed, make it a national asset for electric propulsion testing.

FIBER LASER DEVELOPMENT LAB

Technology Development and Prototyping



Concepts


AEROSPACE



Fiber lasers have revolutionized laser applications in manufacturing, medicine, communications, and space. They are compact and flexible compared to traditional lasers, which makes them mission enabling for many applications. Aerospace is researching fiber lasers and evaluating the related industrial supply chain for space relevant missions. In addition, Aerospace maintains deep expertise in many areas enabled by fiber lasers so that we can advise our customers and provide guidance toward future mission assurance.

A fiber amplifier, which combines power from multiple smaller lasers.

The Photonics Technology Department has over 20 years of experience in advanced laser solutions relevant for our customers' missions. Aerospace focuses fiber laser research in areas that are not addressed by industry but are required for our customers:



In communications, fiber lasers are used to send messages via on/off pulses of light. We are demonstrating fast communications (broadband) from small CubeSats that can provide data-rich content from a low size, weight, and power (SWaP) platform.



Lidar is essentially a light-based radar that can make use of the pure output of fiber lasers. Larger systems can amplify output performance while maintaining purity of the starting laser, enabling detection of minuscule objects over very long distances. The MAFIOT telescope at our Mt. Wilson facility is a long-range lidar system utilizing a fiber laser that was developed in-house.



We perform satellite sensor calibration by directing fiber lasers with known power and wavelength into space.



FREE-SPACE LASER APPLICATIONS

Resiliency and Space Warfighting R&D



Technology Development and Prototyping

The Sky Access Lab uses cutting-edge technology developed at Aerospace to give us a better look at the sky. Laser technology has evolved dramatically over the past 50 years, and the ways lasers can be applied to space programs have advanced commensurately. At Aerospace, we investigate ways in which emerging laser and detector technologies can support the needs of national security space.

Light detection and ranging (lidar) is a remote sensing method used to measure distances by illuminating the target with a laser and measuring the reflection. By



The MAFIOT telescope serves as a testbed for emerging laser technology.

developing fiber lasers in the lab that are small but have "pure" output — meaning the power, beam quality, and wavelength (color) are all as nearly perfect as possible — larger systems can amplify output performance while maintaining the purity of the starting laser. This enables lidar to detect very small objects over very long distances in space.

The Mt. Wilson Aerospace Facility for Integrated Optical Tests, or MAFIOT, provides a unique testbed to support a wide range of optical experiments, including atmospheric laser propagation, atmospheric scattering, laser communications, and other laser applications. MAFIOT is designed to augment space domain awareness capabilities that combine different wavelength bands of light for passive and active tracking, better characterizing space objects.



The Mt. Wilson Aerospace Facility for Integrated Optical Tests (MAFIOT).

A HERITAGE OF LASER CAPABILITIES TO MEET CRITICAL CUSTOMER NEEDS:

- Development of the laser beacon program to support all OPIR assets
- Development of the Aerospace Transportable Lidar System to provide ground truth to the Defense Meteorological Satellite Program
- Development of the Mt. Wilson Aerospace Facility for Integrated Optical Tests (MAFIOT)



HYPERSPECTRAL IMAGING



Resiliency and Space Warfighting R&D

Airborne infrared hyperspectral imaging (HSI) can detect gases and solids on the ground from a safe distance, with applications ranging from earth science to domestic counter-terrorism. While the Department of Defense routinely uses this capability to spot ground-based vehicles, Aerospace has expanded it into Earth science applications, such as mineral mapping, global warming studies, and crop health analysis.

The Aerospace-developed MAHI and Mako sensors provide the best combination of



The hyperspectral imaging team at Aerospace focuses on end-to-end mission support, from planning to data analytics. Our aim is to be responsive, and we are constantly working on new approaches to support the time-critical missions of our customers.

sensitivity and aerial coverage available to our diverse customer base. Combining that with our unique science expertise, the Aerospace team can perform missions that no one else can.

As the world's climate heats up, many areas in the western United States are experiencing increasingly larger and more devastating wildfires, along with a corresponding increase in dangerous air quality from wildfire smoke. An Aerospace team took to the skies to capture valuable data related to the environmental and atmospheric effects of these wildfires and the smoke they generate.

The FIRESTORM 2020 mission flew a Twin Otter aircraft at altitudes of 12,500–17,500 ft above the Creek Fire burning east of Fresno, Calif., now recognized as the largest fire in the state's history. Mako and MAHI were onboard the craft, detecting and identifying gases resulting from widespread wildfires, and analyzing the movement and effects of these gases on the environment.

The need for these sensors and Aerospace's expertise will only grow with the challenges faced by our intelligence, law enforcement, and climate communities. The HSI team's continued work will focus on faster response time for agile customer support, mission-tuned hardware and software prototypes, and customer-specific informatics that tailor our response to the unique needs of every mission.



Mako is a longwave infrared scanner capable of 128 bands of spectral resolution. Pictured here aboard a Twin Otter aircraft prior to the FIRESTORM mission.



MAHI (left) is a midwave infrared scanner capable of 640 bands of spectral resolution. During the Creek Fire of 2020, it was used to measure toxic gases during a series of flyovers.



LASER BEACON

Resiliency and Space

Warfighting R&D



Technology Development and Prototyping

Laser beacon systems are used during calibration/validation tests of new sensors. Beacon systems allow government customers use of an independent, low-cost resource that can be deployed on short notice — a capability unique to Aerospace. The laser beacon project generates a suite of wavelengths ranging from the edge of the visible spectrum out to the mid-infrared and is used as a ground-based source for calibrating focal plane arrays on existing satellite assets.

Aerospace is in the process of upgrading laser sources to give broader coverage of the types of sensors that the beacons can



The remote operated "Robo-Beacon."

simulate during the execution of a calibration/validation test. The uniqueness of the Aerospace beacon systems is their variety. Fully equipped mobile beacons, small footprint "Mini-Beacons" or a remote operated "Robo-Beacon" can be used depending on the level of support required.

Since 1971, an Aerospace beacon system has been involved in every early-orbit test of a Defense Satellite Program or Space-Based Infrared System satellite. Aerospace also has experience in deploying beacons outside of the continental U.S.A. with the first such deployment to Maui, Hawaii, in the late 1980s. The beacon laser is currently being upgraded to support higher power operation and additional wavelengths.

As beacon capabilities advance, Aerospace continues to expand requirements to meet customer needs. These new challenges have spurred the evolution of new laser sources and operational techniques. Future beacon developments will increase the remote operability of systems, and these systems' replication will reduce overall operating costs and personnel needs while improving beacon functionality.



The gimbal atop the first mobile beacon.



The first laser beacon, circa 1970s.



The mobile beacon in Australia.



MICROELECTRONICS



Spacecraft contain tens of thousands of microelectronic parts that need to work reliably in the harsh environment of space. As the aerospace industry shifts to greater use of consumer electronics and faster development and delivery cycles, the need arises for faster, more agile microelectronic reliability assessments and screening methods.

Aerospace has tools and the techniques necessary to assist our government and contractor customers to develop missionrelevant screening methods, and to provide critical and timely microelectronics parts assessments when problems arise.

of-Flight Secondary Ion Mass Spectrometr CAPABILITY Plasma Focused Ion Beam X-ray CT Scanning 10⁻²mm 1mm 10⁻¹mm 10⁻³mm 10⁻⁴mm 10⁻⁵mm 10⁻⁶mm 10⁻⁷mm 100nm 1A 1um 10A SPATIAL RESOLUTION 2010 Integrated Circ ated Circuits

The Microelectronics Lab has a state-

of-the-art suite of tools for analyzing structure and defects in modern microelectronic devices down to the atomic scale. Understanding device features and trace level contamination is essential for addressing degradation and reliability concerns in microelectronic devices. We investigate the entire life cycle of a component, including design, fabrication, how the component reacts to stress such as space radiation or extreme temperatures, and finally, we do failure analysis after the fact.

Aerospace is able to investigate problems deeply and provide information that is unattainable by the vast majority of contractors. We are constantly striving to improve our analysis capabilities and develop techniques in anticipation of problems in future materials, devices, and technologies. We provide solutions when programs and customers have no other options.



Our scientists use X-ray CT scanners to peer deep inside space systems and their components in search of flaws.



The plasma focused ion beam is a unique capability that can image, cut, manipulate, weld, and analyze microelectronic devices all in one.



The transmission electron microscope transmits a beam of electrons through a sample to create an image at incredibly high resolution.

PSLT023.0225_MCEC © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.



MICROPROPULSION





Technology Development and Prototyping

Science-Enabled Agility

Concepts

Testing Miniature Components

Aerospace has been involved with small satellites for nearly 20 years. Scaling down propulsion devices from large satellites to small satellites has been challenging and largely impractical due to power requirements and technology miniaturization. However, this is changing in today's space environment, motivated by our customer's need for agile, resilient space.


Our micropropulsion ground testing facility, nicknamed "The Snake Pit," is outfitted with thrust stands and diagnostics specially tailored for testing miniature propulsion systems. This ground test data



Senior Scientist Andrea Hsu examines an optical component for the torsional thrust stand, which is used to measure very small amounts of force in a vacuum environment.

is essential for risk-reduction via qualification testing and predicting on-orbit performance. The chamber uses precise, delicate instruments, designed and built in-house, to measure how much thrust (force) a miniature thruster can produce.

The field of small satellite propulsion is growing fast, fueled by the influence of rapidly emerging startup companies. These startups often lack the test and diagnostic capabilities and expertise that our lab can provide. The knowledge generated from these test campaigns would benefit our customers, helping them select the correct systems for their missions. Our role as an FFRDC and our subject matter expertise in both small satellites and propulsion uniquely positions us to track, evaluate, and test these micro-propulsion systems for the benefit of our customers.



MIT's Space Propulsion Laboratory, headed by Dr. Paulo Lozano, has provided us with electrospray laboratory thrusters for testing. The thrusters are the small beige cubes, and they are mounted on computer boards that regulate the power supply. Aerospace tests both commercial and academic thrusters.



The torsional thrust stand allows scientists to measure very small forces, equivalent to the weight of an eyelash, that are produced by small satellite propulsion systems. The thrust stand must be carefully balanced and leveled before each measurement.



This sensitive instrument sits inside a large vacuum chamber to simulate conditions in space. Vacuumcompatible cameras allow scientists to monitor the health of the thrust stand while it's under vacuum and running a test.

PSLT004.0225_MPRO © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.

AEROSPACE

PHYSICAL SCIENCES LABORATORIES

NON-DESTRUCTIVE EVALUATION

The Non-Destructive Evaluation (NDE) Laboratory develops and practices techniques for screening parts and materials for flaws to ensure flightworthiness. The lab is equipped with a wide variety of capabilities and staffed with experts who have the experience and responsiveness to solve difficult and urgent problems that require unique and innovative solutions.

We actively pursue emerging technologies that can advance the current state of the art. One of the biggest needs is the development of field-deployable methods which enable NDE techniques and expertise to be promptly brought to the site of the problem.






Concepts



Technology Development and Prototyping

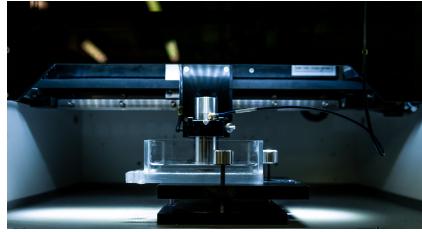

Acoustic microscopy can image the inner and outer parts of a component with sub-micrometer resolution.

The lab possesses all major NDE capabilities so that customers with last-minute requests and challenging inspection problems can benefit from Aerospace's ready-to-deploy inspection techniques. The breadth of capabilities at our disposal is unique and allows for a tailored approach for each inspection.

Among many responsibilities, the NDE group frequently inspects parts for the following criteria:

- Material defects in metallic and composite parts, such as cracks, delaminations, disbonds, porosity and others.
- Structural defects such as misplaces or missing inner components and wiring and connection problems.
- Materials characterization, such as degradation of rubber, preload stresses, microstructure, dielectric property measurement and others.



Shearography is used to inspect a composite overwrapped pressure vessel, revealing weak spots due to damage.



A scientist operating the scanning acoustic microscope.

KEY CAPABILITIES:

- Visual-microscopy, SEM, borescope, dye penetrant
- Acoustic emission monitoring
- Radiography-portable sources (flash and microfocus), nano-focus, real time
- Thermography
- Ultrasound (contact, phased array, acoustic microscopy, EMAT, aircoupled, laser ultrasound)
- Shearography
- Eddy current
- Microwave and millimeter wave

The Aerospace Corporation | 14745 Lee Road, Chantilly, VA 20151 USA | www.aerospace.org PSLT014.0225_NNDE © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.

OPTICAL COMMUNICATIONS

Tachas



AEROSPACE

Technology Development and Prototyping Science-Enabled Agility

Communication is one of the most critical functions space assets must perform. The method that has been used for years is radio waves, but it imposes restrictions on newer missions involving smaller space assets and deep space (longrange) missions. Optical communications (which use lasers) offer many advantages compared with radio waves, such as smaller size, weight, and reduced power requirements, in addition to increased performance.

Optical communications can be broken down into two basic requirements: a source and a receiver. Our optical communications labs are working on




The Optical Comm Dome serves as a ground station to communicate with our laser commenabled CubeSats.


validating next-generation laser sources and detectors, namely lasers that are higher power while maintaining a low size, weight, and power footprint, and detectors that are very sensitive to very weak signals. We are demonstrating that powerful, compact lasers can be developed for space missions where laser comm is important. We are exploring the industry and evaluating highly sensitive detectors for use in space and applicability for communications.

There is a strong history of experience in optical communications within Aerospace, spanning more than 20 years. In 2018, we demonstrated the first space-to-ground optical comm link from a CubeSat, as part of the Optical Communications and Sensor Demonstration (OCSD) mission, which was funded by NASA. The laser signal was received at our Optical Comm Dome in El Segundo, California.

There is a constant need for faster, lighter, and better satellite communications systems. As the technologies for this field have evolved, so have the requirements. As communications technologies have matured in the commercial sector, Aerospace has kept pace with validating and demonstrating appropriate advancements relevant for space so that our customers can make the most informed decisions possible.

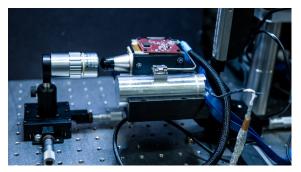

An array detector capable of counting individual photons, which reduces the power required for the laser transmitter.

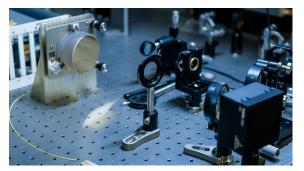

Optics used for converting the laser beam to the correct size and shape for transmission.

OPTICAL SIGNAL PROCESSING






AEROSPACE

Development and Prototyping



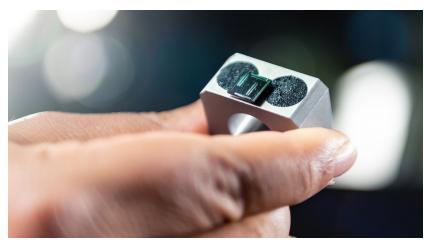


A photonic integrated circuit designed and built by Aerospace.


Aerospace is using optical propagation in a special purpose PIC to perform the signal compression needed for a novel radio frequency receiver based on the compressive sensing technology. The goal of this work is to produce a packaged receiver that can detect arbitrary sparse signals across RF bands of interest with size, weight, and power (SWaP) requirements consistent with use on a CubeSat or unmanned aerial vehicle. This laboratory is supported by analytical simulations and PIC design software. Aerospace leads the world in compressive sensing for RF signals.

We are performing proof-of-principle experiments on photonic neural network architectures. These neural networks are expected to be low SWaP, high-speed solutions to problems such as classifying unknown signals, predicting unknown signals, and removing distortions such as multipath and nonlinearities from signals of interest. Two U.S. patents and journal articles contribute to Aerospace's lead in developing these technologies. We are now upgrading several aspects of the laboratory to allow processing of larger datasets at faster speeds.

The new generation of modern space-based sensors generate ever-increasing amounts of data. Optical signal processing is a method to address these large data sets. Optical signal processing uses photons for computation in place of electrons. The attraction of optical signal processing is the ability to perform massively parallel calculations without electrical loss or heat generation. The enabler for optical signal processors is the advent of foundries that can produce photonic integrated circuits (PIC) that dramatically reduce the size of optical processors. At the same time, these foundries can inexpensively replicate PICs through standard integrated circuit fabrication processes.

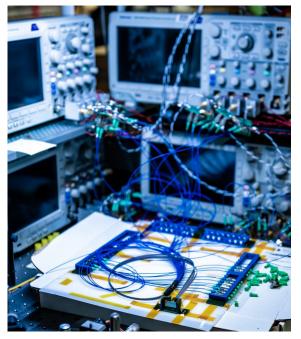

The optical signal processing work being performed at Aerospace stands to reduce the size, weight, and power of future satellite signal processing systems.



Optical signal processing uses photons to handle the enormous amounts of data that the communications systems of the future will require.

The Aerospace Corporation | 14745 Lee Road, Chantilly, VA 20151 USA | www.aerospace.org PSLT020.0225_OPSP © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.

PROPULSION RESEARCH FACILITY

AEROSPACE

Technology Development and Prototyping

Science-Enabled

Agility

Propulsion is the requisite technology for enabling space access. Space systems are often exposed to extreme environments with narrow margins for structural integrity and to propellants that are extremely reactive. Testing these systems in a simulated environment is crucial to success.

The Propulsion Research Facility (PRF) performs tests that only a few other sites in the U.S. can perform. Our state-of-the-art diagnostics allow deeper understanding of the interaction of both chemistry and physics. Combined with Aerospace expertise, these capabilities enable our customers to improve propulsion reliability and performance.



The Propulsion Research Facility at Aerospace


Three Key Experiments

The Propulsion Research Facility is dedicated to investigating new technologies and propulsion systems.




OXFIRE

Ignition of metals via friction within a high-oxygen environment can cause a catastrophic failure event. This experiment studies the ignition characteristics of various metals, rubbed together at high speeds within a highpressure oxygen environment.





The two burner experiments in the PRF are the "Atmospheric Co-axial Injector Experiment" and the "Pressurized Uni-Element Rocket Injector Experiment" (PUERIE). These study combustion instabilities in liquid rocket engines and how they are coupled to feedline or chamber acoustic instabilities.



COKER

Liquid Natural Gas (LNG), an emerging propellant, contains some contaminants that may "coke" or deposit, inside of the lines, restricting or, in worst case scenarios, blocking them. This experiment characterizes coking tendencies for LNG under various environmental conditions.

QUANTUM PHOTONICS

Technology Development and Prototyping Advanced Concepts

AEROSPACE

Quantum technology stands to revolutionize many of the communication, sensing, and computing processes we perform in space.

Quantum technologies propose to use properties of atoms and photons to generate disruptive new technologies that are fundamentally inaccessible with classical systems. Such quantum properties can be exploited to perform secure communication, enhanced sensing and imaging, parallelized computing, etc. which will have significant impact on national security space and related programs.

Aerospace has demonstrated quantum applications in cryptography, developed analytical and numerical toolboxes to analyze system level implementations of quantum photonics technology, and built testbeds for


evaluating entangled photon sources and detectors that are an integral part of quantum photonics technology.

We have a long history of technology development and maturation related to nonlinear optics, lasers, lidar, remote sensing, atomic clocks, optical communication, and optoelectronic devices for space applications. Such photonic devices make up the core subsystems of quantum photonics technology.

Aerospace has the deep technical expertise required to understand fundamental science, technologies, and their application substantiated by decades-long activities in photonics technology development for space applications. This makes Aerospace an objective agent to evaluate proposed solutions, provide informed guidance in the area without biases, and help guide contractors through technology development pitfalls.



Aerospace has a long history of photonics expertise and leadership, which is critical to understanding the next generation of photonic devices.

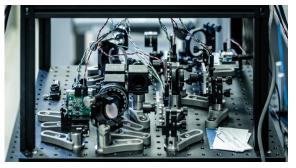

The Quantum Cryptographic Lab studies how to transmit data in a manner that is fundamentally secure.

PSLT021.0225_QMPH © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.

RADIATION EFFECTS

Testing Miniature Components

There is significantly more high-energy radiation present in space than on the surface of the Earth. This high-energy radiation, also called ionizing radiation, can damage and degrade components like solar cell coverglasses, microelectronics devices, and composite materials. Testing components and materials for their susceptibility to ionizing radiation damage is essential to ensuring a full mission life for our space assets.

Aerospace has an extensive history testing ionizing radiation effects in materials and devices using Co-60 radiation, a simple and relatively inexpensive way to emulate the

space environment. Aerospace has helped understand radiation effects in relevant materials and devices for over 30 years. Aerospace currently operates a 7000 Ci Co-60 irradiator, and also a low dose-rate irradiator dedicated to

studying the ELDRS (Enhanced Low-Dose Rate Sensitivity) effect in bipolar microelectronic devices. These irradiators allow us to replicate the space environment and rapidly assess risk to critical satellite components. The demand for evaluation of the effect of radiation on space components is only increasing. With the new need for rapid evoter acquisition and the lowering of eact for appear to appear to appear these here here here here an increased interact in fielding.

space environment.

rapid system acquisition and the lowering of cost for access to space, there has been an increased interest in fielding systems making use of commercial off-the-shelf (COTS) components. COTS parts radiation tolerance is generally lower than traditional space hardware, and also highly variable. This will necessitate new testing paradigms for higher throughput testing. Aerospace stands ready to pioneer these new testing approaches for a rapidly evolving space enterprise.

The mug on the right was placed inside the Co-60 irradiator, and demonstrates the effects of radiation on glass.



Some devices actually have more trouble with a low dose of radiation, and this low dose-rate Co-60 irradiator is specifically for testing those types of devices.





Aerospace's 7000 Ci Co-60 irradiator tests samples to determine how they would respond to the





AEROSPACE

REPLICATED OPTICS





Technology Development and Prototyping



The composites used as a substrate for the optics are made in an autoclave, which controls the temperature, pressure, and cure time for composite fabrication.

Innovation Developed in the Lab


Replicated composite optics stand to replace conventional polished glass optics in precision imaging applications. Glass optics are heavy, require extensive manufacturing time, and are often the limiting factor for cost and schedule in space imagery satellites. Replicated optics, made from a polymer composite, can do the same job in much less time at a fraction of the weight. Aerospace developed this mission-enabling technology using our breadth of multidisciplinary expertise.

Replicated composite technology allows for the use of freeform optics in imagery

systems that can't be achieved with conventional polished glass optics. Traditional glass mirrors require grinding and polishing to the required shape and smoothness and must be of extremely high quality to maintain their shape. Freeform optics are non-symmetric optical surfaces that allow advantages such as system miniaturization, fewer optical components, and even new functionality.

While replication technology has been used for decades, it had never been demonstrated to perform at the optical quality required for precision imaging applications. The innovative processes developed in the lab have resulted in lighter, cheaper mirrors that can be produced in a fraction of the time. The replicated optics team has also developed new test processes to ensure reliability of the mirrors in the harsh space environment.

Aerospace currently owns four patents on the curing and treatment processes developed to achieve the quality and stability necessary for space applications. The lessons learned from this multidisciplinary effort can be applied to other applications such as bonding optical components in payloads.



Replicated resin layer on a composite substrate with a composite core (after edge trimming and before metallization).



Comparison of a curved and a flat mirror: the object being imaged, at bottom, is a 3-D printed Inconel® Aerospace logo. The reflected image in the curved mirror at left appears magnified compared to the flat mirror on the right.

ADVANTAGES OF REPLICATED OPTICS OVER TRADITIONAL PROCESSES:

- Reduced weight
- Rapid manufacturability
- Low cost
- High impact tolerance
- · Tailorable CTE and thermal conductivity

RF BREAKDOWN (MULTIPACTOR)

Resiliency and Space Warfighting R&D

Multipactor is a type of electrical breakdown that occurs in high-power radio frequency (RF) and microwave systems in vacuum. It can cause signal degradation and hardware damage. In recent years, improvements in solar cell efficiency have given us increases in onboard power that introduce breakdown problems in frequency regimes that previously were too high for breakdown. Numerous programs have suffered serious issues as industry analysis and test techniques have struggled to identify problems early in the hardware development phase. The Aerospace team has the experience, technical knowledge,

Science-Enabled Agility

The multipactor lab has multiple test facilities capable of testing a wide variety of hardware at high power.

Our research focuses on the fundamental physics of breakdown targeted towards our customers' current and future needs - complex signals, breakdown sensitivity to RF pulse profile, and advanced materials Secondary Electron Yield (SEY). We have also developed a state-of-the-art modeling tool which has unique capabilities that are unavailable in the current analysis codes on the market. This new tool, the Systematic Multipactor Research Tool (SMRT) can provide more accurate analysis and capture complex physics that affect the severity of breakdown issues. This means we can predict breakdown location, power level, and severity.

The ability to rapidly verify flight hardware against multipactor is key to ensuring mission success in a rapidly changing and evolving space enterprise. We develop state-of-the-art test techniques and analysis tools to help solve problems faster than anyone else. We have the best lab in the nation with the most sensitive diagnostics for performing rapid breakdown performance evaluation and root-cause identification.



breakdown detection and root cause identification.



A sample experiencing RF plasma breakdown, which can be particularly damaging to spacecraft components and systems.

KEY CAPABILITIES:

and cross-departmental collaborations to

address problems quickly.

- Multiple TVAC chambers
- · Secondary electron yield measurement
- State-of-the-art diagnostic suite
- · Commercial-and-research grade predictive tools
- High-power test capability up to 1 kW › 100 MHz – 9 GHz
- · Anechoic Test Facility





AEROSPACE

SPACE BATTERIES





Concepts




Technology Development and Prototyping

Science-Enabled Agility

The availability of stored energy is critical to provide electrical power to launch and space vehicles when energy from solar arrays is insufficient. Energy storage devices such as batteries are often a significant portion of the vehicle mass and can be the life-limiting components of a spacecraft. Higher energy or power density can also enable certain missions. Our lab tests, evaluates, and analyzes battery performance in relevant space environments, supporting the spectrum of high-fidelity to agile missions.

The Battery Evaluation Lab has been testing space batteries for decades, starting

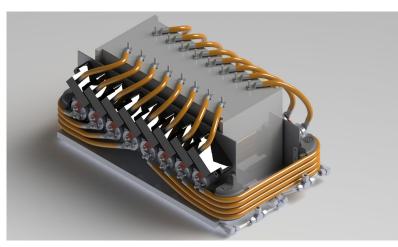

CAD model of battery test fixture assembly.

with nickel cadmium, then nickel hydrogen, and now lithium-ion cells for space vehicles. We also test and have expertise in a variety of primary (non-rechargeable) cell technologies. We employ a team of engineers, technicians, and scientists to design, build, and interpret battery tests in support of national security space.

Using in-house designed battery test software and hardware, we can develop a program-specific battery test. Applying test-as-you-fly principles, we subject batteries to electrical, thermal, and mechanical conditions simulating on-orbit conditions, while measuring detailed telemetry to understand battery performance and degradation over time. This data is valuable for on-orbit trending and anomaly resolution. Custom software and hardware configurations allow us to adapt tests to the customer's needs

Proliferated systems and space resiliency are resulting in increased usage of commercial off-the-shelf (COTS) cells for space. We are building a library of data for COTS Li-ion cells, trending their performance in orbital conditions and accelerated conditions to enable more agile battery acquisition. We use non-destructive test techniques to assess cell performance, increase confidence in cell reliability, and identify counterfeit parts. We can also destructively evaluate cell physical degradation modes, linking them to electrochemical performance. We are also developing better prediction techniques by investigating machine learning models and looking towards next-generation batteries and hybrid systems for improvements that can enable new mission capabilities.



The Battery Evaluation Lab has an extensive history with a wide range of space battery technologies.




COTS Li-ion cells in test fixtures.

The Aerospace Corporation | 14745 Lee Road, Chantilly, VA 20151 USA | www.aerospace.org PSLT016.0225_SPBT © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.

SPACECRAFT CONTAMINATION

Science-Enabled Agility

AEROSPACE

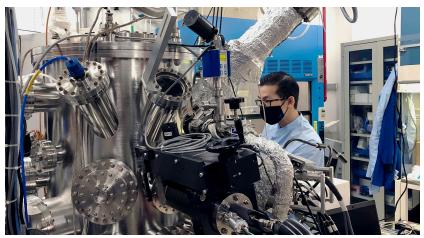

In-situ molecular contaminant characterization and material outgassing testing using the Contamination Effects, Research and Testing (CERT) chamber.


Contamination control plays a key role in mitigating performance degradation for space systems such as optics, solar arrays, and thermal control systems. Spacecraft contamination phenomena can be complex, requiring an understanding of the physical and chemical processes governing contaminant generation, transport, and effects on system performance. The Spacecraft Contamination group draws on decades of cross-program experience and strong industry partnerships to provide timely and expert support to U.S. space programs.

As the leader in the aerospace industry, the Spacecraft Contamination group possesses highly specialized testing and analytical


capabilities. The laboratories are equipped with state-of-the-art facilities capable of studying contaminant transport and deposition in flight-like environments. The test facilities are equipped to characterize the physical, chemical, and optical properties of contaminant films simultaneously, which provides scientific insights into molecular-surface interactions in the space environment.

Where laboratory testing is limited, finite element transport simulations are used to assess contamination in complex space systems, and to enable rapid diagnostic analyses. This capability has been used to elucidate key physical factors contributing contaminant transport phenomena.

The Spacecraft Contamination group's unique capabilities have been utilized to address contamination issues, to perform anomaly root-cause investigations, as well as to provide independent contamination risk assessments.



Optical Interference of Contamination Effects (OICE) chamber for in-situ and real-time characterization of molecular film growth and optical properties.



Atomic force microscopy image of the surface morphology of a silicone contaminant film.

KEY CAPABILITIES:

- Material outgassing testing
- Particulate contaminant characterization
- Molecular contaminant analysis
- Contaminant surface interaction analysis
- Transport modeling




SPACE DOMAIN AWARENESS



Resiliency and Space Warfighting R&D

As more nations have advanced space capabilities, it becomes increasingly critical for the U.S. to be cognizant of what else is operating in space, an area known as Space Domain Awareness (SDA). However, the current SDA enterprise is not integrated. Data does not flow smoothly from photons to decision support tools for the warfighter, which means we are responding too slowly.

Space control and SDA is a technically challenging problem with many requirements: extensive sensor networks for observational capacity, geometric diversity for solar lighting conditions, broad ground sensor coverage, and response times on a tactical scale. Aerospace's SDA

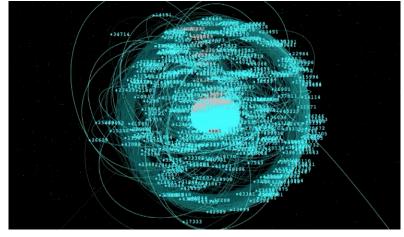

SDA will require artificial intelligence/machine learning solutions as the space environment grows more contested and congested. The Aerospace SDA team is pioneering new approaches to these challenging problems.

team is uniquely qualified to address all these issues to improve data flow and decision speed.

One foundational issue is how to use multiple heterogeneous sensors to collect data on a plethora of targets. This requires scheduling sensors, communicating observational tasks to them in real time, acquiring these observations autonomously, and reporting the data back to a central data store. Scheduling is a particularly complex problem with many variables, since the sensors, targets, Earth, and sun are all in relative motion. Artificial intelligence/machine learning is a promising solution path that can be leveraged to meet the timescales we need.

Aerospace is leading the way in establishing an operational pipeline for SDA sensors with project Prime Focus – a prototype automated SDA node. Prime Focus will automate the 1-m AeroTel telescope located at our El Segundo facility. User inputs will generate an automated observation schedule that can account



for light conditions, and then report data products to the users automatically. The node relies on cloud infrastructure, cloud storage, and software management that is aligned with modern software practices. This demonstration can then be scaled to fill the SDA need to coordinate large numbers of sensors with multiple targets.

AeroTel, a 1-meter telescope located at our El Segundo campus, serves as the sensor testbed for project Prime Focus.




SPACE ENVIRONMENTAL EFFECTS

Science-Enabled Agility

The space environment is an operational regime that can be challenging to even the most robust materials. The Space Environmental Effects (SEE) lab has established a multi-decade history of space environmental effects testing and evaluating the performance of spacecraft materials in many orbital environments.

The SEE Lab maintains multiple stateof-the-art exposure facilities dedicated to high-fidelity simulation of space environment effects. Each ultrahigh vacuum facility features multiple radiation sources (broadband and vacuum ultraviolet illumination, 1–100 keV electrons,

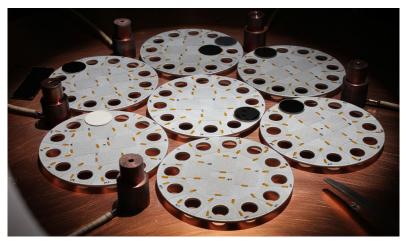


A matrix of solar cell coverglass samples under test in the exposure facility.

2–100 keV protons) and vacuum-compatible in situ spectrometers (230–1100 nm transmittance, 250–2800 nm reflectance). Recently, a vacuum-compatible infrared (2–6 mm) spectrometer system was added; this measurement capability is new to the field of space environment effects testing. The facilities are designed to operate 24/7 during exposure tests, which can last for months at a time.

The SEE Lab's exposure facilities are regularly employed to perform accelerated laboratory test programs that simulate the effects of space radiation environments in a variety of surface spacecraft materials:

- Thermal control materials
- Optics and optical coatings
- Solar cell cover glass materials
- Radome materials

The SEE Lab supports a wide range of national security space programs by providing high-fidelity material performance data. The SEE Lab continues to expand its capabilities to meet the growing demands of our customer base.

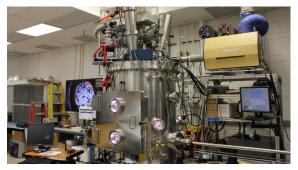

A space environmental effects exposure facility used to perform accelerated simulated space radiation exposure testing and characterization of materials.



These materials were exposed to laboratory-simulated space radiation for a period of 14 years.

The Aerospace Corporation | 14745 Lee Road, Chantilly, VA 20151 USA | www.aerospace.org PSLT015.0225_SEEM © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.



SPACE PHOTOVOLTAICS






Iechnology Development and Prototyping Science-Enabled Agility

Solar cells generate power for all Earth orbiting satellites and limit how long you can operate your satellite and how many capabilities it has. The solar array is also typically the largest component of the satellite, which makes it more susceptible to damage in orbit. Our lab seeks to characterize, understand, and improve all components of the solar array to increase the resiliency of our satellites in the space environment.

Aerospace has a world-class space photovoltaic evaluation and research laboratory for spacecraft power generation and resilience applications. We combine

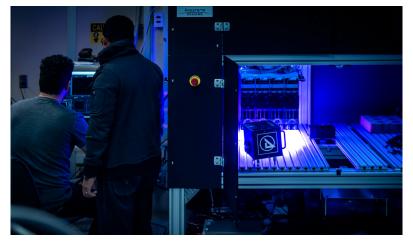

An LED-based solar simulator used to characterize CubeSat solar panels.

state-of-the-art laboratory capabilities, expertise in foundational science and technology, cross-program and industry knowledge, and expansive vision of missions to support and lead innovation in the industry.

Aerospace has been evaluating space solar array performance since our founding in 1960. As space solar cells have advanced in performance, Aerospace has been at the forefront of development and research, partnering with industry and customers to advance the technology and capabilities to provide the most accurate and objective comparisons between technologies.


As space acquisition cycles become shorter, our state-of-the-art laboratory capabilities for solar cell characterization and our patented near-space solar cell calibration platform enable us to meet the needs of any advanced solar cell technology development in a rapidly changing space enterprise.



Our scientists use this proton accelerator to simulate proton radiation from space, which is one of the main causes of solar cell failure.



Aerospace is funding an R&D project to use a supercontinuum laser to simulate the exact spectrum of the sun.

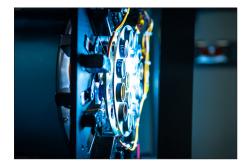

The custom Xe-lamp based solar simulator is highly tunable for measuring all advanced space solar cell technologies.

PSLT006.0225_SPPV © 2025 The Aerospace Corporation. All trademarks, service marks, and trade names contained herein are the property of their respective owners.



SPACE SENSORS






Development and Prototyping Advanced Concepts

The space environment can be harsh, particularly when it comes to radiation. A comprehensive understanding of the radiation environment is needed to support rapid anomaly assessment, reduce uncertainty in design margins, and support the growing space industrial base.

For more than fifty years the Space Sensors Laboratory has been designing, building, and launching sensors to assess the space environment. Miniaturization of these sensors has enabled more to be flown, improving models and our fundamental understanding of Earth's trapped radiation, shown right.

Spacecraft must also contend with the upper atmosphere and ionosphere, the electrically charged

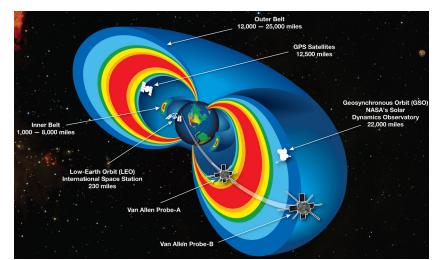

A cutaway model of the radiation belts. Illustration courtesy NASA.

layer all signals must pass through from space to ground. The ionosphere may severely impact radio frequency signals, causing them to be absorbed, reflected and scattered, which can seriously disrupt mission activities.


The upper atmosphere, or more specifically the thermosphere, impacts the orbits of low-Earth orbit (LEO) satellites by causing drag. The 3D wave-like variations observed in the upper atmosphere impact satellite re-entry predictions, potential collision predictions, and precise orbit positioning.

The Space Sensors Laboratory develops sensors to study all these effects, with instruments that image atmospheric waves both from the ground and from space. Recent CubeSat developments also aim to image the upper atmosphere from LEO and perform measurements of the ionosphere using techniques such as GPS radio occultation.




PIANO

Phenomenology Imager & Nighttime Observer (PIANO) is a prototype low-light imager supporting LEO weather and overhead persistent infrared augmentation missions on the International Space Station.



Microdosimeter

The Aerospace-developed Teledyne microdosimeter, a step forward in the miniaturization of radiation instrumentation, has been included in numerous space missions to better characterize the radiation environment.



LLITED

The Low-Latitude lonosphere/ Thermosphere Enhancements in Density (LLITED) mission is two 1.5U CubeSats that will measure and study the nighttime upper atmosphere.



THIN FILMS AND OPTICAL COATINGS




Development and

Prototyping

Advanced Concepts

Multilayer optical coatings are essential elements of almost every spacecraft since they are used in sensor systems, thermal control strategies, and photovoltaic power sources. Meeting the performance and durability specifications for advanced optical coatings requires detailed knowledge of the correlation between the thin-film deposition process and the resultant film properties. In addition, accurate modeling of the space environment and high-fidelity simulation of space environmental effects on optical coatings are crucial for all space missions.

This laboratory combines thin film deposition and testing capabilities and expertise with our world-class Space Environmental Effects Lab test capability. This unique combination of facilities and cross-field knowledge enables Aerospace to independently assess the performance of optical coatings being acquired for current and future national security space programs. Our approach is

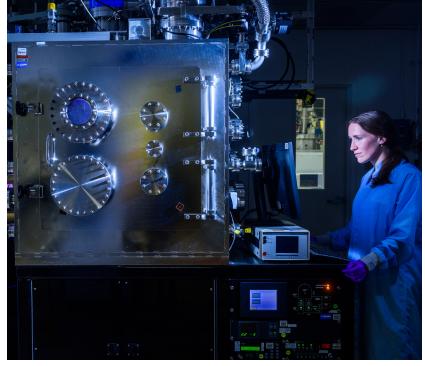

A scientist operates Aerospace's custom Plasma Beam Sputtering System.

to fabricate and test thin film materials in one integrated program. This gives us a unique opportunity to develop best coating techniques and practices based on measured performance in various simulated environments.

The performance and durability of optical coatings are highly dependent on optimal coating processes. Our coating facilities feature multiple state-of-the-art sputter deposition systems that include high-efficiency reactive gas controls to significantly enhance the quality of dielectric coatings. A new double-planetary substrate fixture has been installed in our Plasma Beam Sputtering System to improve coating uniformity across large optics. Additionally, a new space environmental exposure facility is currently being integrated to meet the high demand from our customers.



Example of dark mirror antireflection coating deposited at Aerospace.



The custom Plasma Beam Sputtering System uses an RF plasma source (the purple region) to synthesize advanced optical coatings.



Example of an advanced optical coating deposited on a curved substrate.

